

Inclinotifier

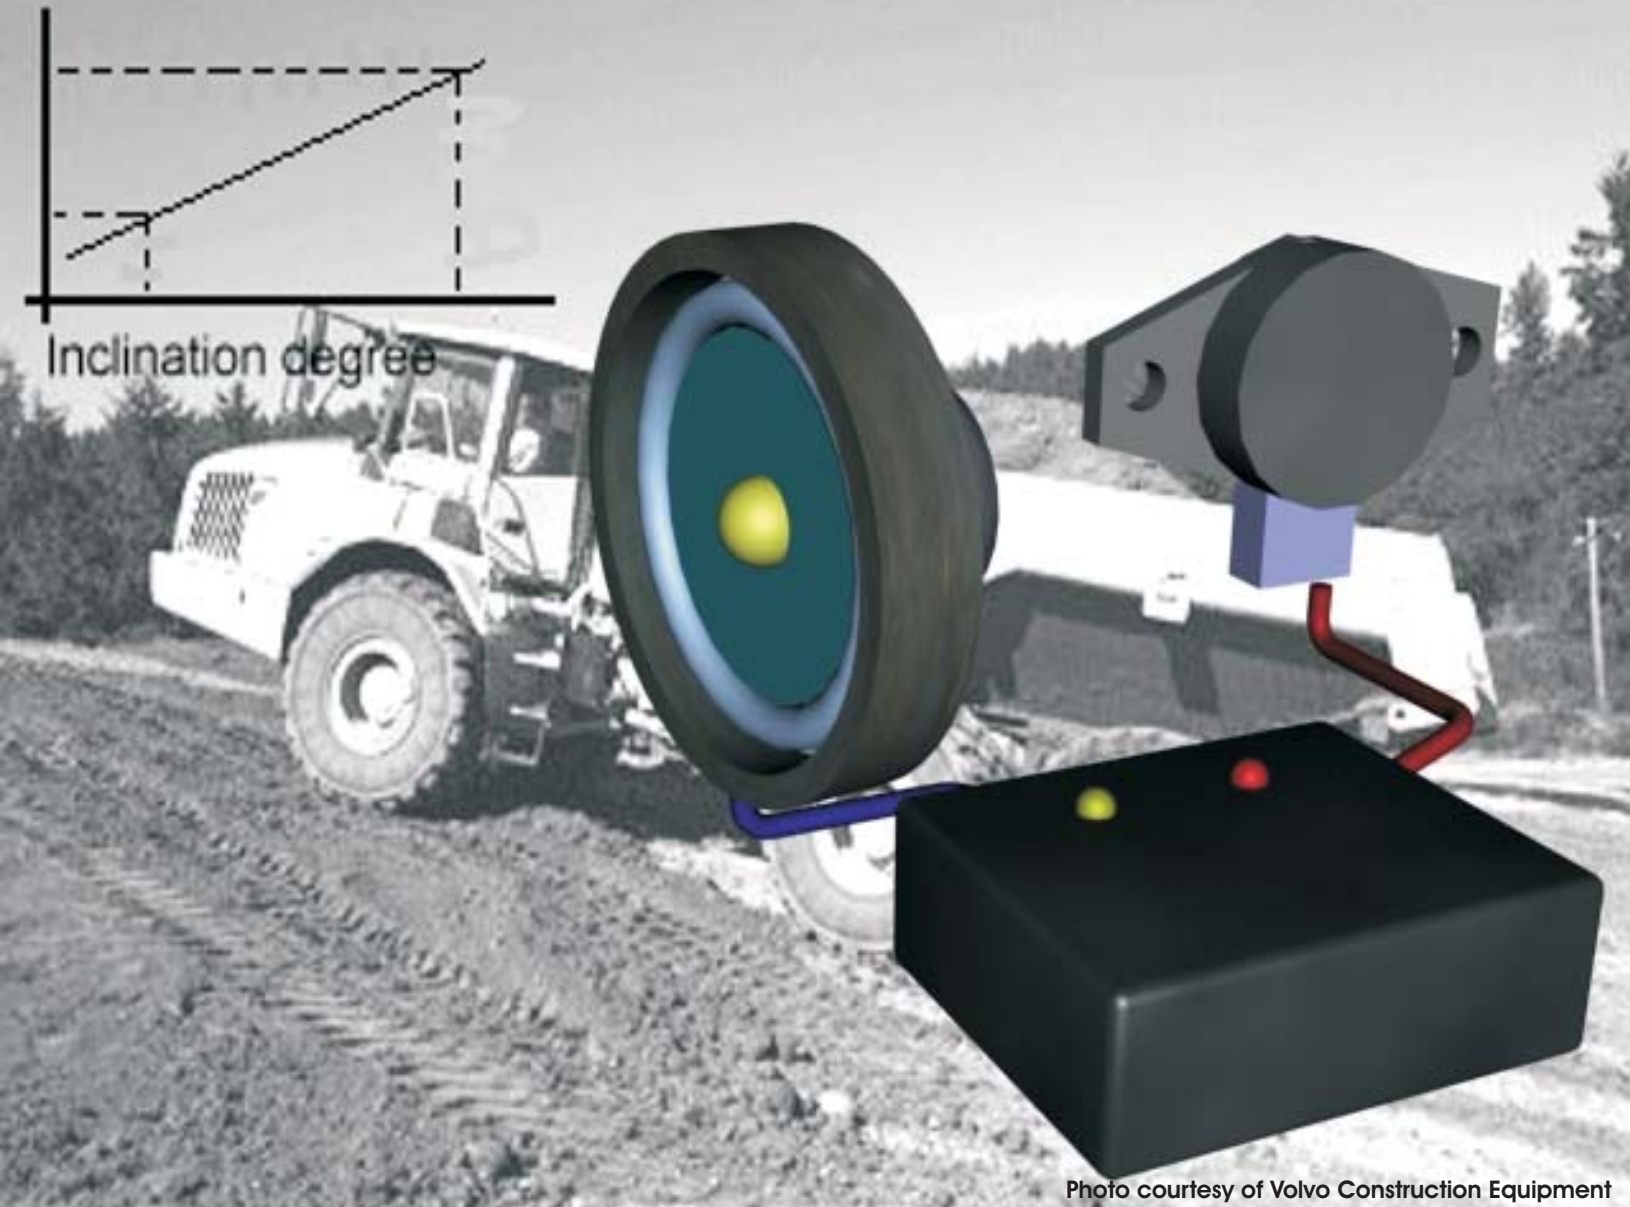


Photo courtesy of Volvo Construction Equipment

Perlindungan total terhadap unit Anda dari accident akibat kemiringan unit secara transversal dan longitudinal, akibat uneven ground. Memberikan peringatan dini bagi operator bila mendekati kondisi berpotensi terguling (roll-over). Dan secara otomatis mematikan engine saat unit terguling untuk mencegah kerusakan yang lebih parah.

General specification:

Operating voltage : 12V and 24V DC

Power consumption : 1000mA (standby) 1500 mA (active)

Time delay to engine shutdown : 30 seconds

Buzzer : 86 dB

Warning level 1 : @30% (indicator lamp yellow)

Warning level 2 : @35% (indicator lamp re and buzzer)

Adjustable according to site regulation